

WITNESS MONUMENT TIES:

- MAG nail set in hack 0.5' above grade in the east side of a 5" maple;
N 15° W 12.1'
- MAG nail found 0.6' above grade in the north side of a 6" twin sugar maple;
S 15° E 16.8'
- MAG nail in Monroe County Survey sign found on south side of dead 10" ash;
N 86° E 16.4'
- MAG nail set in hack 0.5' above grade in the east side of a 6" twin maple (the other stalk has a 2" diameter);
N 72° E 33.5'

MONUMENT ACCESSORIES:

(#333) Section Corner Sections 4 & 5-T7N-R1W (CICr_I01). An 8" x 8" cut limestone with 3" brass tablet stamped "INDIANA LIMESTONE COMPANY 1928 - COR- SEC- 4&5" with dimple and north arrow found 8" above grade;
S 89° 51' 46" E 21.70'

(#334) A 3" brass tablet stamped "INDIANA LIMESTONE COMPANY 1928 - CORNER - 50 FT - W" with dimple and north arrow found 0.1' above grade on the south bank of a small creek;
S 88° 52' 46" E 40.29'

OTHER ACCESSORIES:


A 5' t-post with Monroe County Surveyor sign attached 2.7' above grade was set 0.5' southeast of the rebar.

OTHER OBSERVATIONS:

The monument is on the south side of a small creek approximately 172 feet east of the east right-of-way fence of northbound State Road 37.

NOTES:

- Field work was performed on May 12th and 17th, 2017.
- Monroe County Surveyor's Field Book 50, pages 36 & 39.
- Project Name: ClearCreek2017, Field work by: RSO & TER, Drawn by: RSO, Reviewed by: RSO & TER.
- Coordinates shown hereon were obtained from GPS observations utilizing the Indiana Real-Time Network (INCORS). Indiana West Zone, NAD83(2011) Epoch 2010.0000, State Plane Grid Coordinates, US Survey Feet. Geoid model G2012BU7. Datum NAD83_NO_TRANS.
- Coordinate data for CICr_I01, Per_I25, and witness ties were collected using a Sokkia Set 510 total station.
- Vicinity sketch was compiled per 2017 aerial photography.
- This monument was accepted by the Monroe County Surveyor Review Board on June 16, 2006. We collected coordinates on the known monument in preparation for an upcoming perpetuation survey in the area. Historic research has not yet been performed to prove the validity of this monument. The prior Monument Record references a Smith Neubecker & Associates boundary survey performed for Victor Oolitic Stone Co., on file in the Office of the Monroe County Surveyor.

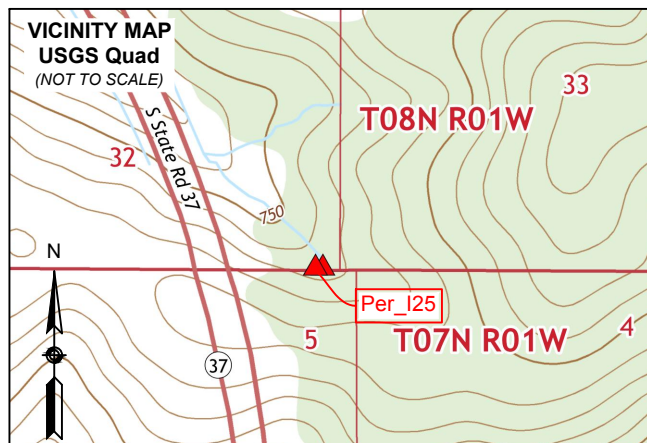


▲ **Monument Description:** $\frac{5}{8}$ " rebar with yellow plastic cap stamped "BLEDSOE TAPP PC50920004" found 1.0' above grade.

State Plane Grid Coordinates: Northing: 1395495.3', Easting: 3108215.5'

SHEET 1 OF 2	MONUMENT RECORD CORNER ID: Per_I25	Section Corner Section 32 & 33- T08N-R01W Perry Township Monroe County, Indiana	OFFICE OF THE MONROE COUNTY SURVEYOR Trohn Enright-Randolph Monroe County Surveyor Rachel Savich Oser Professional Surveyor 119 West 7th Street, Bloomington, IN 47404 (812) 349-2570
-----------------------	--	---	---

Photos were taken on 5/12/2017 with an iPhone 6s

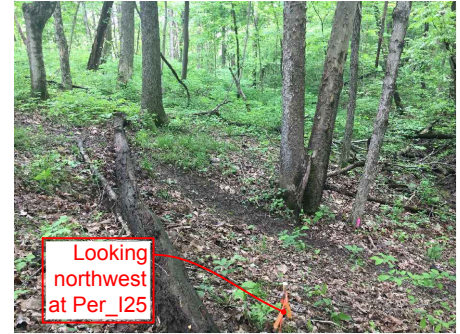


Trohn Enright-Randolph
Trohn Enright-Randolph
Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review Board
on December 19, 2017



Rachel Oser
Rachel Savich Oser, State of Indiana
Professional Surveyor No. 21100022

SHEET 2 OF 2	MONUMENT RECORD CORNER ID: Per_I25	Section Corner Section 32 & 33- T08N-R01W Perry Township Monroe County, Indiana		MONROE COUNTY SURVEYOR'S OFFICE Trohn Enright-Randolph Monroe County Surveyor Rachel Savich Oser Professional Surveyor 119 West 7th Street, Bloomington, IN 47404 (812) 349-2570
-----------------------	--	---	--	--

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 32

Township: 8 North


Range: 1 West

Corner ID: Per I-25


Monument Description & Remarks: 5/8" Rebar with, "BLEDSOE TAPP", cap found. Survey Sign 5.5ft A.G. at Pt. (C).

References On File: Smith Neubecker & Associates, Inc. survey, VICTOR OOLITIC STONE CO. (Boundary Survey), in surveyors office.

RECOVERY TIE DRAWING
Field Book 37 Page No. 71

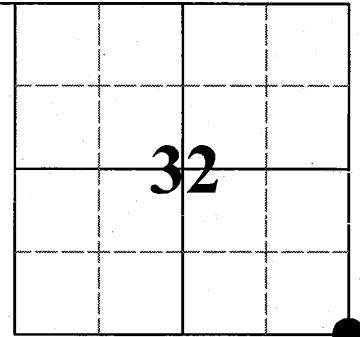


- A - 5/8" Rebar with cap.
B - S 86° E 21.75' Brass Disc
in Limestone Base. .
C - S 89° E 16.53' to MAG nail
in Survey Sign on 10" White Ash.
D - S 86° E 40.38' to 3" Brass
Disc in Creek Bed.
E - S 10° E 16.72' to MAG nail
in 10" Sugar Maple.

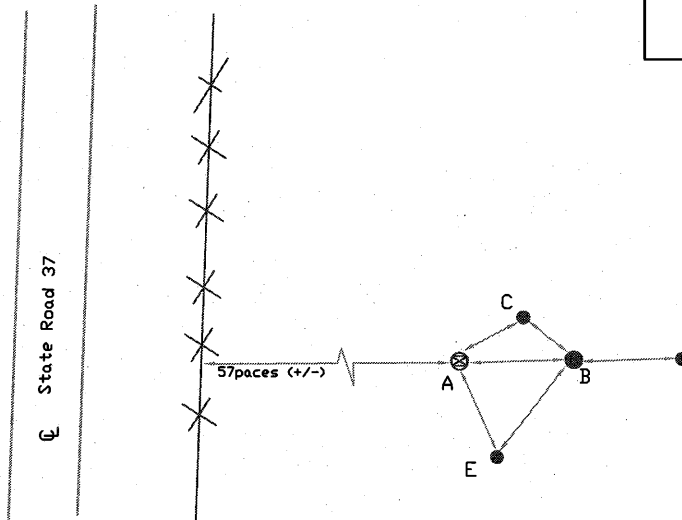

Not To Scale
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 2nd day of January 2006.

Kevin P. Enright



Administered by the Monroe County Surveyor Review Board

Date: 6/16/2006